
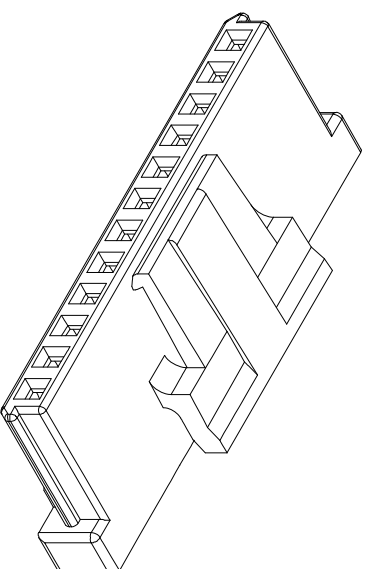

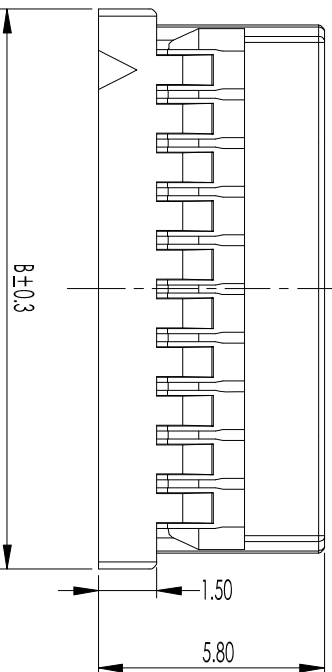
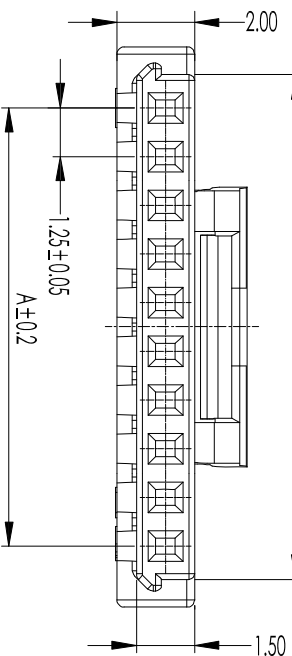


CRTS	DMA	DMB	DM8
02	1.25	4.40	2.75
03	2.50	5.65	4.00
04	3.75	6.90	5.25
05	5.00	8.15	6.50
06	6.25	9.40	7.75
07	7.50	10.65	9.00
08	8.75	11.90	10.25
09	10.00	13.15	11.50
10	11.25	14.40	12.75
11	12.50	15.65	14.00
12	13.75	16.90	15.25
15	17.50	20.65	19.00
20	23.75	26.90	25.25
25	30.00	33.15	31.50
30	36.25	39.40	37.75

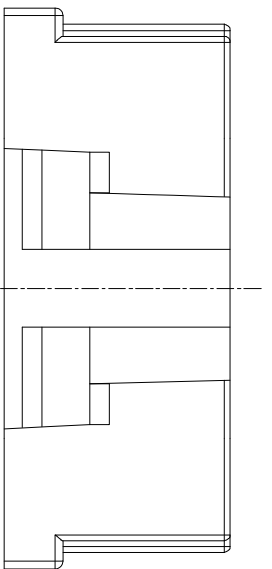

- NOTES:
1. Current Rating: 1.0A AC/DC
  2. Voltage Rating: 150V AC/DC
  3. Temperature Range: -35°C to 85°C
  4. Contact Resistance: 20mΩ Max.
  5. Insulation Resistance: 500MΩ Min.
  6. Withstanding Voltage: 500V AC/minute

- A - 125 03 H xx S - 66 - 5 - 1
- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ① A=Board to Wire Connector
  - ② 125=Pitch 1.25mm
  - ③ 03=03[DFI 4] Type Series
  - ④ C=Connector/H=Housing/T=Terminal
  - ⑤ xx=No of Contacts
  - ⑥ 0=Standard/M=Male/F=Female
  - ⑦ S=Single Row Type/D=Dual Row Type
  - ⑧ PT=PB1/66= Nylon 66/46= Nylon 46/6T= Nylon 6T/9T= Nylon 9T/LP=LCP/PS=PPS
  - ⑨ 0=General(通常,一般的)/1=Without Latch/2=With Latch/3=Without Eared/5=With Eared
  - ⑨ 1=PE Bag Packing

Item	Parts Material	Specification	Qty	Note	P/N
①	Insulator	Nylon 66/UL94V-0 / Color: Natural(White)	1000PCS		

**SRCO** 东莞市盛瑞科技有限公司  
Dongguan Shengrui Technology Co., Ltd.

修正 Revisions  
A.01 T1253-DFI4S-HSG Tony 2019/05/16  
A.02 变更料号 Tony 2020/07/21

-Tolerances-  
Unless otherwise specified  
公差

XX.X : ±0.25 D: ±0.20  
XXX.X : ±0.13 Z00-800 : ±0.5  
X.XXX : +0.08 800-490 : ±0.20  
X. : +2° L : +0.90 : ±0.10

TEL: 86-769-8216714/87988875 MAIL: srco@dsrco.com  
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI TECHNOLOGY CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

机型 Model	-	核准 Approved	谭 07/21/20	图名 Description:	
客规 Customer P/N	-	审核 Checked	郑昊 07/21/20	Pitch 1.25mm Cimp Style	
盛瑞料号 Part No.	A-12503HWS-66-2-1	安规 Safety	谭 07/21/20	Housing(DFI 4)	
Environmental standard	RoHS	製圖 Draw	谭 07/21/20		
单位 Unit:mm	比例 Scale	頁碼 Page	1/1		