CKTS	DIM A	DIM B
02	1.25	3.60
03	2.50	4.85
04	3.75	6.10
05	5.00	7.35
06	6.25	8.60
07	7.50	9.85
08	8.75	11.10
09	10.00	12.35
10	11.25	13.60
11	12.50	14.85
12	13.75	16.10
13	15.00	17.35
14	16.25	18.60
15	17.50	19.85

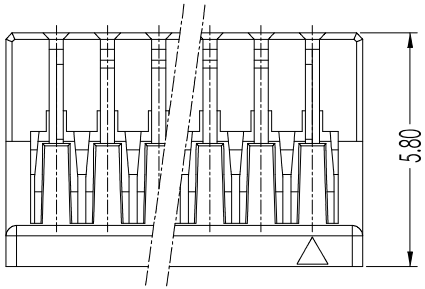

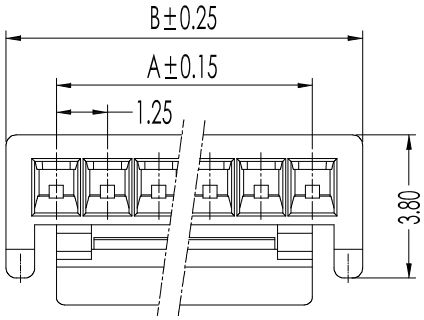

2Pin - 7Pin



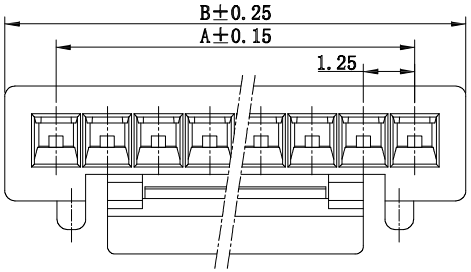

8Pin 以上



NOTES:

1. Voltage Rating: 100V AC,DC
2. Current Rating: 1.0A AC,DC
3. Working Temperature: -40° C to 85° C
4. Insulation Resistance: 1000MΩ Min. at 500V DC.
5. Contact Resistance: 20mΩ Max.
6. Insulation Resistance: 100MΩ Min.
7. Withstanding Voltage: 250 AC/minute.

A - 125 05 H xx S - 66 - 5 - 1

① ② ③④⑤⑥ ⑦ ⑧ ⑨

① A= Board to Wire Connector
② 125= Pitch 1.25mm
③ 5= 5(GH) Type Series
④ C=Connector/H=Housing/T=Terminal
⑤ XX= No.of Contacts
⑥ S=Single Row/D=Double Row
⑦ PTPBT/66= NyLon 66/46= NyLon 46/
6T= NyLon 6T/9T= NyLon 9T/LP=LCP/PS=PPS
⑧ 0=General/5=5 Model Type
1=PE Bag Packing / 2=Tube Packing / 3=Tape&Reel Packing
⑨ 4=Hot Tape &Reel Packing / 5=PVC Tray Packing

Item	Parts Material	Specification	Q'ty	Note	P/N
①	Insulator	Nylon66 94V-0 /Color: White			A12505-HSG-101

Rev.	修正 Revisions	
A.01	A1255GH-HSG	Tony 2019/05/16
A.02	变更料号	Tony 2020/07/21

-Tolerances-
Unless otherwise specified
公差

连接器公差	线材公差
X.X : ±0.25	0-200 : ±5
X.XX : ±0.13	200-800 : ±10
X.XXX: ±0.08	800-1490 : ±20
X.° : ±2°	L >1490 : ±30

SRCO® 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL:86-769-82167146/87988175 MAIL:srco@gdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

機型 Model	-	核准 Approved	Tian 05/16/'16
客號 Customer P/N	-	審核 Checked	郑岚 05/15/'16
盛瑞料號 Part No.	A-12505HxxS-66-5-1	安規 Safety	
Environmental standard	RoHS	製圖 Drawn	Tong 05/15/'16
單位 Unit:MM 比例 Scale:	Third angle projection	頁碼 Page	1/1

圖名 Description:
Pitch 1.25mm(GH) Crimp Type Insulator