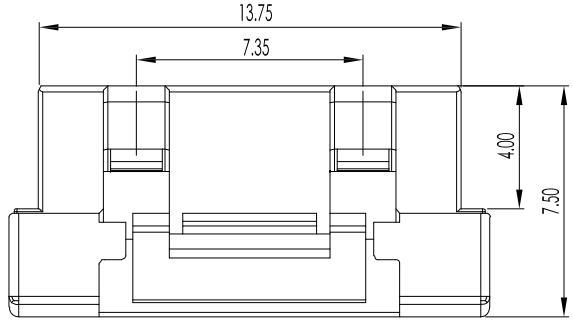

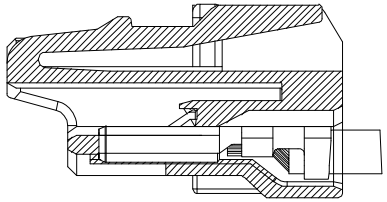

TERMIAL ASSEMBLY DARWING

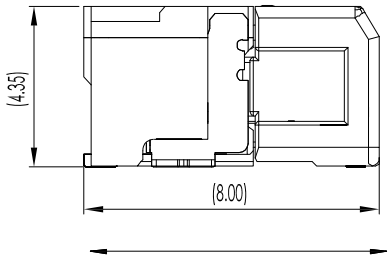

MATED WITH HEADER ASSEMBLY

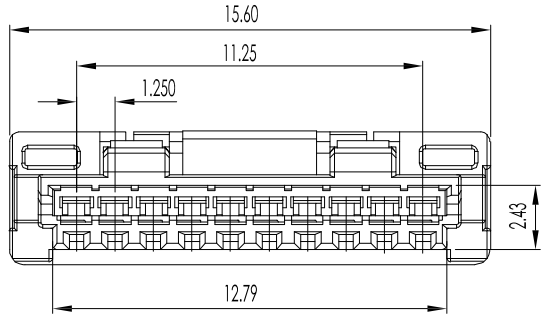



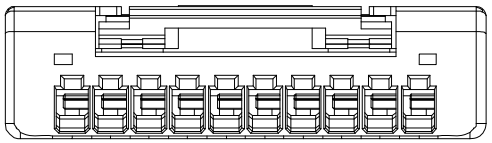

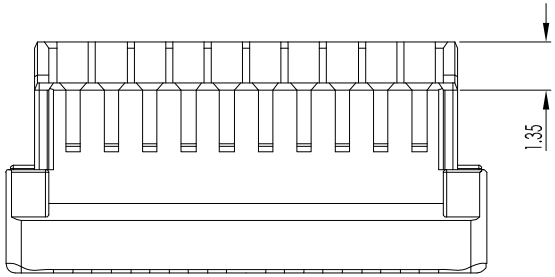

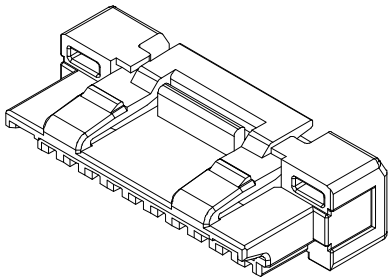

NOTES:

1. Current Rating: 1.5A AC/DC
2. Voltage Rating: 200V AC/DC
3. Temperature Range: -25° C to 85° C
4. Contact Resistance: 20mΩ max.
5. Insulation Resistance: 1000MΩ min.
6. Withstanding Voltage: 500V AC/minute
7. Applicable Wire: AWG #28 to AWG #26

A - 125 06 H 10 S - 66 - 0 - 1

① ② ③④⑤⑥ ⑦ ⑧ ⑨

① A=Board to Wire Connector
② 125=Pitch 1.25mm
③ 06=06 Type Series
④ C=Connector/H=Housing/T=Terminal
⑤ 10=10pin
⑤ 0=Standard/M= Male/F=Female
⑥ S=Single Row Type/D=Dual Row Type
⑦ PT=PBT/66= NyLon 66/46= NyLon 46/
6T= NyLon 6T/9T= NyLon 9T/LP=LCP/PS=PPS
⑧ 0=General(通常,一般的)/M=Male type/F=Female Type
⑨ 1=PE Bag Packing

Item	Parts Material	Specification	Q'ty	Note	P/N
①	Insulator	NyLon 66,UL94V-0 / Color: Beige			A12506-HxxS-101

Rev.	修正 Revisions	
A.01	A1257H-10	Tony 2019/04/20

-Tolerances-
Unless otherwise specified
公差

连接器公差	线材公差
X.X : ±0.25	0-200 : ±5
X.XX : ±0.20	200-800 : ±10
X.XXX: ±0.10	800-1490 : ±20
頁碼 Page: 1/1	L >1490 : ±30

SRCO® 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL:86-769-82167146/87988175 MAIL:srco@gdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

機型 Model	-	核准 Approved	Tian 04/20/'19
客號 Customer P/N	-	審核 Checked	
盛瑞料號 Part No.	A-12506H10S-66-0-1	安規 Safety	
Environmental standard	RoHS	製圖 Drawn	郑岚 04/20/'19
單位 Unit:MM 比例 Scale:	Third angle projection	設計 Design	Tong 04/20/'19

圖名 Description:
Pitch 1.25mm Crimp Style Housing