

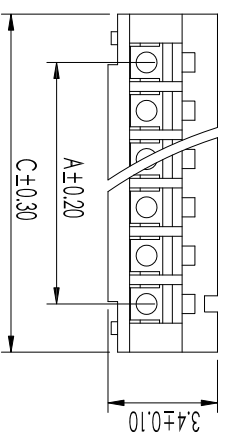
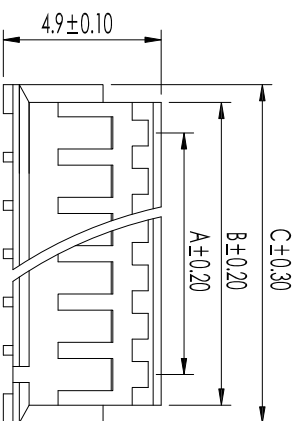
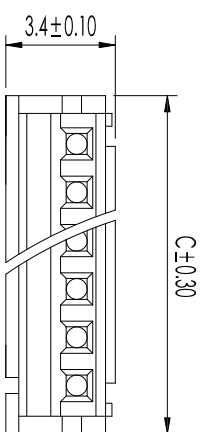



CSS	DMA	DM8	DMC
02	1.50	3.40	4.50
03	3.00	4.90	6.00
04	4.50	6.40	7.50
05	6.00	7.90	9.00
06	7.50	9.40	10.50
07	9.00	10.90	12.00
08	10.50	12.40	13.50
09	12.00	13.90	15.00
10	13.50	15.40	16.50
11	15.00	16.90	18.00
12	16.50	18.40	19.50
13	18.00	19.90	21.00
14	19.50	21.40	22.50
15	21.00	22.90	24.00
16	22.50	24.40	25.50

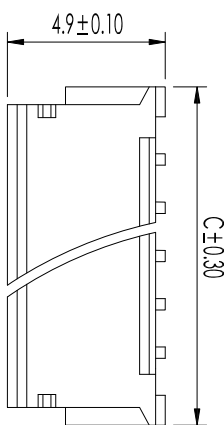

- NOTES:
1. Current Rating: 1.0A AC/DC
 2. Voltage Rating: 50V AC/DC
 3. Temperature Range: -25° C to 85° C
 4. Contact Resistance: 20mΩ Max.
 5. Insulation Resistance: 500MΩ min.
 6. Withstanding Voltage: 500V AC/minute

- A - 150 01 H xx S - 66 - 0 - 1
- ① ② ③④ ⑤⑥ ⑦ ⑧ ⑨
- ① A=Board to Wire Connector
 - ② 150=Pitch 1.50mm
 - ③ 01=01(ZH) Type Series
 - ④ C=Connector/H=Housing/T=Terminal
 - ⑤ xx=No. of Contacts
 - ⑥ 0=Standard/M= Male/f=Female
 - ⑦ S=Single Row Type/D=Dual Row Type
 - ⑧ PT=PBT/66= Nylon 66/46= Nylon 46/6T= Nylon 6T/9T= Nylon 9T/LP= LCP/PS=PPS
 - ⑨ 0=General(通常一般的)/M=Male type/f=Female Type
 - ⑩ 1=PE Bag Packing

Item	Parts Material	Specification	Qty	Note	P/N
①	Insulator	Nylon 66/UL94V-2/ Color: White	✕		A15001-HSG-66

Rev.	修正 Revisions	
A.01	A1501WR-SL-XP	Tony 2009/07/15
B.01	变更料号	Tony 2020/07/21

- Tolerances - Unless otherwise specified	
公差	公差
XX : ±0.25	XX : ±0.25
XXX : ±0.15	XXX : ±0.15
X : ±0.05	X : ±0.05
Y : ±0.02	Y : ±0.02
Z : ±0.01	Z : ±0.01

SRCO 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL: 86-769-8216714/87988875 MAIL: srco@dsrco.com

機型 Model	-	審核 Approved	Tian	07/21/20
客號 Customer P/N	-	審核 Checked	鄭晨	05/13/20
盛瑞料號 Part No.	A-15001HSG-66-0-1	安規 Safety		
Environmental standard	RoHS	製圖 Drawn	Tong	05/13/20
單位 Unit:mm	比例 Scale	頁碼 Page	1/1	

圖名 Description: A15001-HSG-66 Housing Pitch 1.50mm(ZH) Cimp Style