
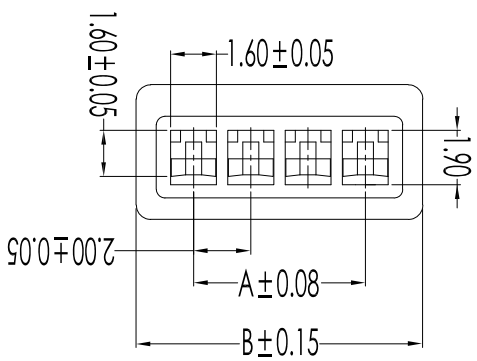
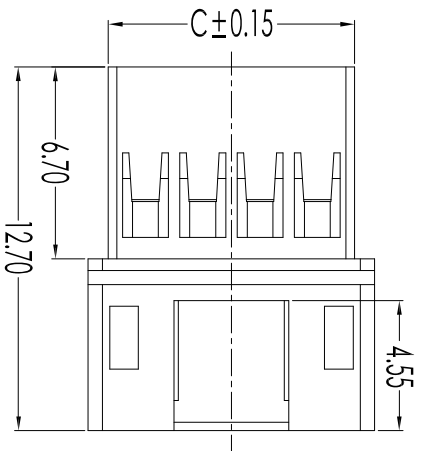
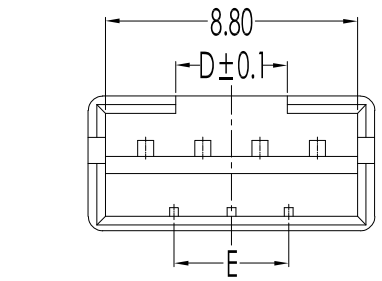


CCS	DMA	DMB	DMC	DMD	DME
02	2.0	6.0	4.6	0.80	0.00
03	4.0	8.0	8.6	2.10	2.00
04	6.0	10.0	10.6	3.90	4.00
05	8.0	12.0	12.6	5.90	6.00
06	10.0	14.0	14.6	7.90	8.00
07	12.0	16.0	16.6	9.90	10.00
08	14.0	18.0	18.6	11.90	12.00
09	16.0	20.0	20.6	13.90	14.00
10	18.0	22.0	22.6	15.90	16.00
11	20.0	24.0	24.6	17.90	18.00
12	22.0	26.0	30.6	19.90	20.00

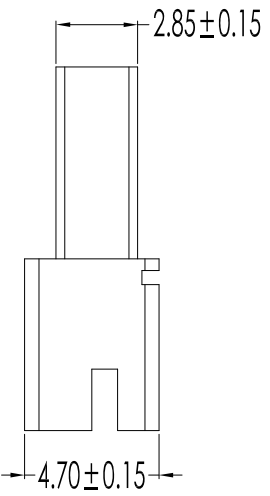

- NOTES:
1. Current Rating: 20A AC/DC
 2. Voltage Rating: 250V AC/DC
 3. Temperature Range: -25° C to 85° C
 4. Contact Resistance: 10mΩ max.
 5. Insulation Resistance: 1000MΩ min.
 6. Withstanding Voltage: 800V AC/minute
 7. Applicable Wire: AWG #30 to AWG #24

- A - 200 01 H xx S - 66 - F - 1
- ① A=Board to Wire Connector
 - ② 200=Pitch 2.00mm
 - ③ 01=01(PH) Type Series
 - ④ C=Connector/H=Housing/F=Terminal
 - ⑤ xx=No. of Contacts
 - ⑥ 0=Standard/M= Male/F=female
 - ⑦ S=Single Row Type/D=Dual Row Type
 - ⑧ PT=PBT/66= Nylon 66/46= Nylon 46/6T= Nylon 6T/9T= Nylon 9T/LP=LCP/PS=PPS
 - ⑨ 0=General(通用) - 1=PE Bag Packing

修正 Revisions

Rev.	修正 Revisions	日期
A.01	A2001HM-NP	Tony 2019/05/16
A.02	变更料号	Tony 2020/07/21

Unless otherwise specified



东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

TEL: 86-769-8216714/87988875 MAIL: srco@dsrco.com

核准 Approved: Tian 07/21/20
审核 Checked: 郑斌 07/21/20
安规 Safety: Tong 07/21/20
製圖 Drawn: Tong 07/21/20
頁碼 Page: 1/1

Item	Parts Material	Specification	Qty	Note	P/N
①	Insulator	Nylon 66/UL94V-0 / Color: Natural(White)	✕		A20001-HxxS-201

公差 Tolerances -
除非另有规定
公差
XX: ±0.40 D: ±0.20
XXX: ±0.25 200-800: ±0.5
X: ±0.25 800-1490: ±0.70
X: ±0.25 1490-2000: ±1.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI TECHNOLOGY CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

機型 Model: -
客號 Customer P/N: -
盛瑞料號 Part No.: A-20001-HxxS-66-F-1
Environmental standard: RoHS
單位 Unit: MM 比例 Scale: 1:1
Third angle projection

圖名 Description: Pitch 2.00mm Cimp Style Housing