
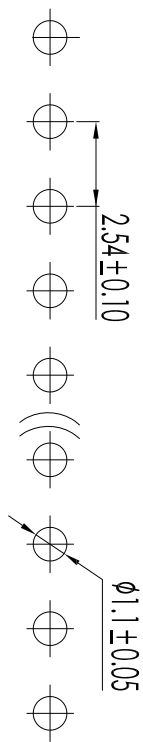
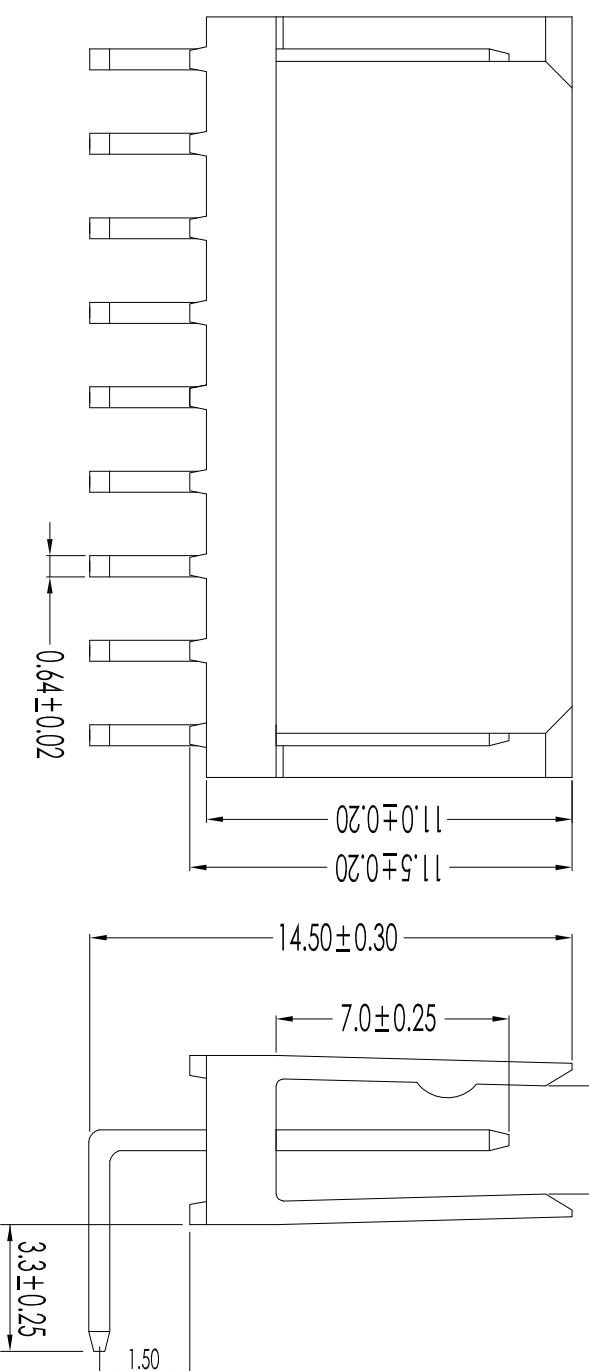


CSX	DMA	DM8
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48

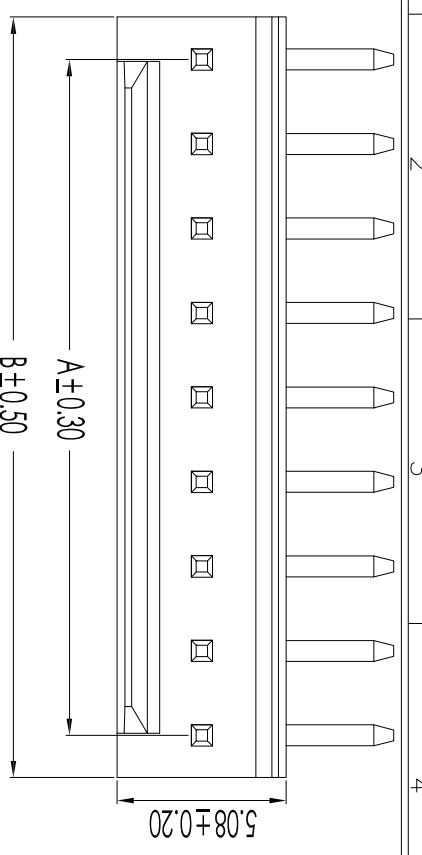

Recommended P.C.B Layout
[PCB Board Tolerance ±0.05]

Item	Parts Material	Specification	Qty	Note	P/N
①	Insulator	Nylon66/UL 94V-2/Color: Black	×		P254T-020-6601
②	Contact	Boss/Gold(Tin) flash all over nickel	×		P254T-064-01GF

Rev.	修正 Revisions
A.01	SR-254-V1XX-1X-HUH Tony 2019/05/16
A.02	变更料号 Tony 2020/07/21

- Tolerances - Unless otherwise specified	
公差	公差
XX : ±0.30	公差
XXX : ±0.20	公差
XXXX : ±0.10	公差
XX.XX : ±0.05	公差
X.XXX : ±0.02	公差
X.XXX : ±0.01	公差
X.XXX : ±0.005	公差
X.XXX : ±0.002	公差
X.XXX : ±0.001	公差
X.XXX : ±0.0005	公差
X.XXX : ±0.0002	公差
X.XXX : ±0.0001	公差

SRCO 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL: 86-769-8216714/6/87988775 MAIL: srco@dsrco.com

机型 Model	客號 Customer P/N	盛瑞料號 Part No.	Environmental standard	單位 Unit:mm	比例 Scale	Third angle projection
-	-	A-2540CS668X-RU-X	ROHS	mm	1/1	Third angle projection

核准 Approved:lan	日期 Date	審核 Checked	日期 Date	製圖 Draw	日期 Date	頁碼 Page
	07/21/20		07/21/20	Tong	07/21/20	1/1

圖名 Description: 2.54mm Cimp Style Right Angle Connector

- NOTES:
- Current Rating: 3A AC/DC
 - Voltage Rating: 250V AC/DC
 - Temperature Range: -40° C to 105° C
 - Contact Resistance: 20mΩ Max.
 - Insulation Resistance: 1000MΩ Min.

- A - 254 05 C xx S - 66 B x - R U - X
- ① A=Board to Wire Connector
 - ② 254=Pitch 2.54mm
 - ③ 05=PH2.54 Style Series
 - ④ C=Connector/H=Housing/I=Terminal
 - ⑤ XX=No. of Contacts
 - ⑥ S=Single Row/D=Dual Row/A=Assembly
 - ⑦ PT=PBT/66= NYLON 66/46= NYLON 46/ 6T= NYLON 6T/PT= NYLON 9T//P=|CP/PS=PPS
 - ⑧ C=Copper Alloy/B=Brass/P=Phosphor Bronze/H=High conductivity copper
 - ⑨ Plating 0=None/T=Tin Bright/G=Gold Flash Plating/I=Tin Matte /Z=3u" Gold/S=5u" Gold/4=10u" Gold/5=15u" Gold/6=20u" Gold/ 7=30u" Gold/8=Nickel Plating/9=Silver Plating/H=Half of Gold Th
 - ⑩ V=Vertical Dip Type/R=Right Angle Dip Type/L=Vertical SMT Type/W=Right Angle SMT Type/S=Special P.C.B Mode
 - ⑪ 0=Standard/1=1 Type/2=2 Type/3=3 Type/4=U Type
 - ⑫ Packaging: 1=PE bag/2=Tube/3=Tape Reel/7=PPC Tray/ 8=Tube+CAP