


- NOTES:
1. Contact Resistance: 30 milliohms Max.
 2. Insulation Resistance: 1000 Mega Ohms Min.
 3. Dielectric Voltage: 500V AC one second.
 4. Operating Temperature: -55° C to 105° C

- H - 2032 54 - xx S 7 - R 1 - x
- ① H=Battery Holder Connector
② 2032=2032 Type
③ 00=General 通用 一般/01=01 type/02=02 type/54=54 type/56=56 type
④ PT=PT/6=Nylon6/46=Nylon46/9T=Nylon9T/LP=LCP/PP=PPS
⑤ C=Copper/P=Phosphor bronze/H=High conductivity copper/S=Stainless steel shell/M=MU Steel
⑥ T=Tin plating/G=Gold flash plating/1=3U" gold/2=5U" gold/3=10U" gold/4=14U" gold/5=20U" gold/6=30U" gold/7=Nickel plating/S=Silver plating
⑦ V=Vertical Dip type/R=Right Angle Dip type/l=Vertical SMT type/W=Right Angle SMT type/S=special P.C.B Module
⑧ 1=Black/2=White/3=Brown
⑨ 1=PE Bag Packing/2=Tube Packing/3=Tape Reel Packing/4=Hot Tape Reel Packing/5=PV/C Tray Packing

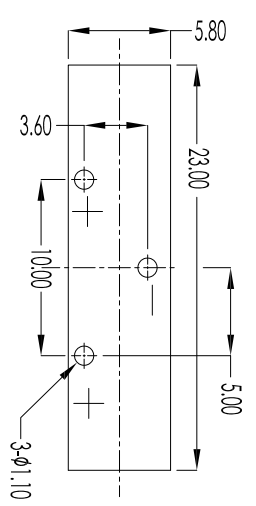

PCB Layout Diagram
Top View

Item	Parts Material	Specification	Qty	Note
③	Terminal(-)	304 Stainless Steel (L=0.25mm/Ni Plating(Ni 100U"-120U")	1 PCS	20325A-HTE-202
②	Terminal(+)	304 Stainless Steel (L=0.25mm/Ni Plating(Ni 100U"-120U")	1 PCS	20325A-HTE-201
①	Housing	PA66 UL94V-0/ Color:Black	1 PCS	20325A-HSG-101

Rev.	修正 Revisions	- Tolerances - Unless otherwise specified	
A.01	SRBS-05-A1B.004-DIP Tony 2016/11/10	公差	
A.02	变更料号 Tony 2020/07/21	制程公差 制程公差	
		XX : ±0.25 P:±0.15	
		XXX : ±0.20 Z00:±0.10	
		X.XXX : ±0.10 800:±0.90 ±.20	
		X° : ±1° L : ±0.90 ±.20	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

TEL: 86-769-8216714/87988875 MAIL: srco@qdsrco.com

东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

機型 Model	-	核准 Approved	Tian	07/21/20
客號 Customer P/N	-	審核 Checked	郑晨	07/21/20
盛瑞料號 Part No.	H-203254-657-R1-X	安規 Safety		
Environmental standard	RoHS	製圖 Drawn	Tong	07/21/20
單位 Unit:mm	比例 Scale: 1:1	頁碼 Page	1/1	

圖名 Description: Battery CR2032-5-4 DIP