


- NOTES:
1. Contact Resistance: 30 milliohms Max.
 2. Insulation Resistance: 1000 Mega Ohms Min.
 3. Dielectric Voltage: 500V AC one second.
 4. Operating Temperature: -55° C to 105° C
- H - 2430 02-00 P 7 - L 0 - X
- ① H=Battery Holder Connector
② 2430=2430 Type
③ 00=General標準 一般/01=01 type/02=02 type
④ PT=PB/T/6=Nylon66/46=Nylon66/9T=Nylon9T/LP=LCP/PP=PPS/PA=PPA/00=Without
- ⑤ C=Copper/P=Phosphor bronze/H=High conductivity copper/S=Stainless steel shell/M=Mn Steel
⑥ F=Thin plating/G=Gold flash plating/1=3U" gold/2=5U" gold/3=10U" gold/4=14U" gold/5=20U" gold/6=30U" gold/7=Nickel plating/S=Silver plating
⑦ V=Vertical Dip type/R=Right Angle Dip type/L=Vertical SMT type/W=Right Angle SMT type/S=special P.C.B Module
⑧ 0=Without/1=Black/2=White/3=Brown
⑨ 1=PE Bag Packing/2=Tube Packing/3=Tube Reel Packing/4=Hot Tape Reel Packing/5=PVC Tray Packing

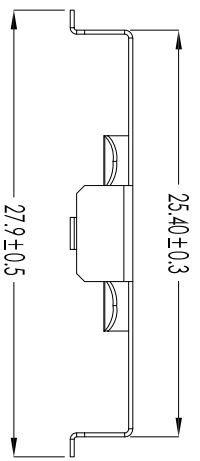

Item	Parts Material	Specification	Qty	Note	P/N
①	Terminal(+)	Phosphor Bronze:1=0.25mm/Ni Plating(100U"-120U")	1 PCS	Weight:0.91g	243001-HTE-201
②					

Rev	修正 Revisions
0A01	SRMW-2430-02-SMT Tony 2016/11/10
A02	变更料号 Tony 2020/07/21

-Tolerances- Unless otherwise specified	
公差	公差
XXXX: ±0.20	公差
XXX: ±0.20	公差
XX: ±0.25	公差
X: ±0.30	公差
0: ±0.15	公差

SRCO 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL: 86-769-8216714/87988875 MAIL: srco@qdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

機型 Model	客號 Customer P/N	盛瑞料號 Part No.	Environmental standard	單位 Unit:mm	比例 Scale	Third angle projection
-	-	H-243002-00P7-40-X	RoHS	mm	1:1	第三角投影

核准 Approved	日期 Date	圖名 Description
審核 Checked	07/21/20	Battery CR2430-X Type SMT
安規 Safety	07/21/20	電池扣
製圖 Draw	Tong 07/21/20	
頁碼 Page	1/1	