



175HB

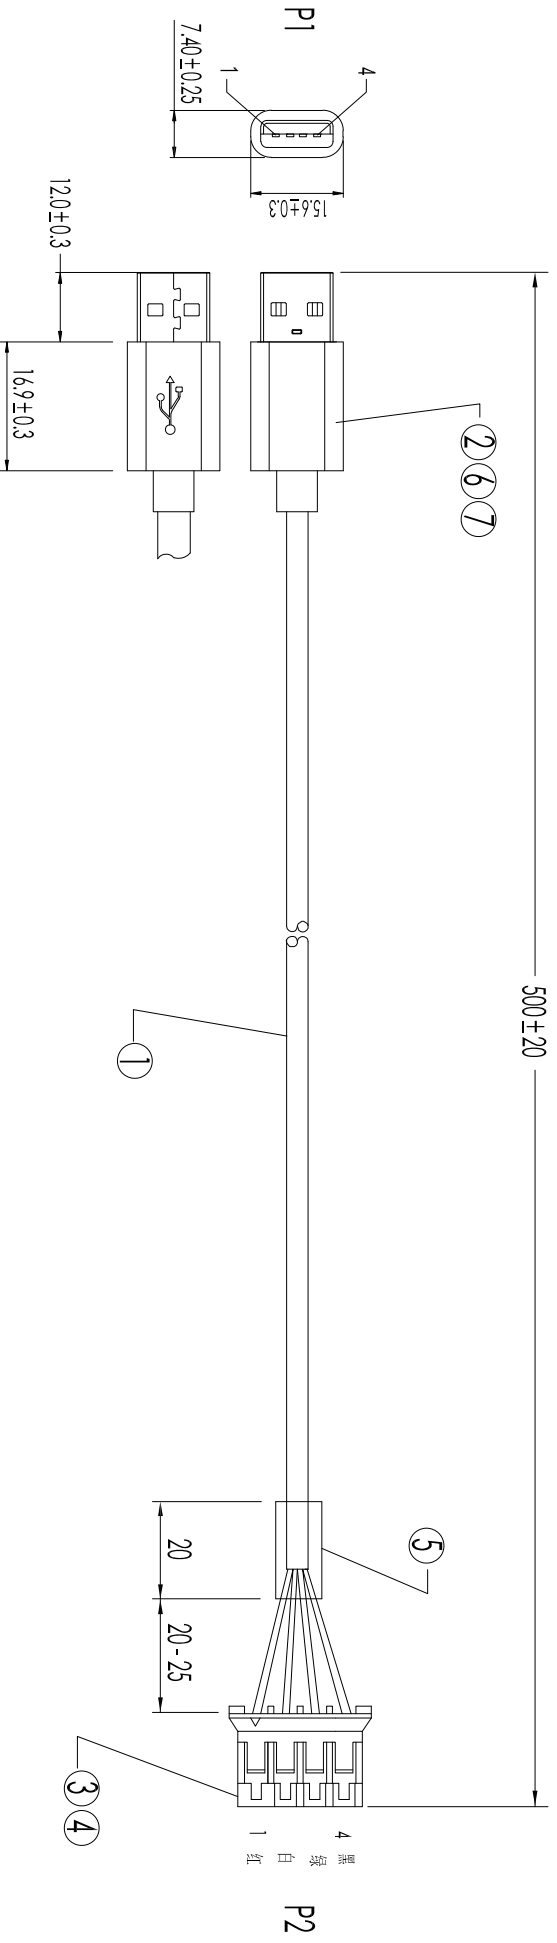

接袋表 (WIRING TABLE)

P1	P2
1 红	1
2 白	2
3 绿	3
4 黑	4

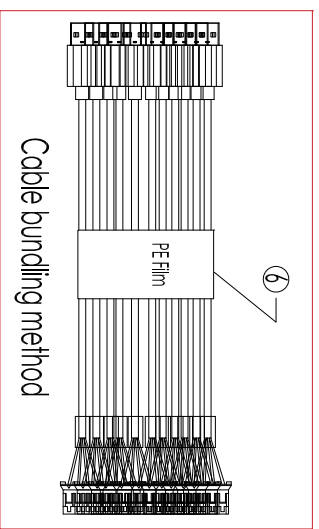

Test Conditions:

1. Open/Short/Intermittence 100% Test.
2. Insulation Resistance: 10MΩ Min.
3. Conduction Resistance: 5Ω Max.
4. Insulation Resistance: DC 300V.

Item	Parts Material	Specification	Qty	Note	P/N
⑧	PE Film	Transparent PE film	1 PCS		G-FE100-PE-WG-1
⑦	External Mold Material	外模料(External mold material) Black PVC 50P	15g		R-PVC50P(BK0)
⑥	Internal Mold Material	内模料(Internal mold material) HD-PE white	9g		R-PE101(WB001)
⑤	Heat-Shrinkable Tubes	热缩套管(Heat-Shrinkable Tubes) Ø3.5mm Black L=20mm	2PCS		G-1A400-01(580-1)
④	Terminal	PH2.0mm TE Phosphor bronze, Tin-plating	4PCS		A-12801(P)-P1-3
③	Housing	PH2.0mm Housing 1x4pin White	1 PCS		A-12801(H)Q4-56-0-1
②	Connector	USB A/M Plug, white insulator, SPCC shell nickel plated	1 PCS		U-130A(M)P(CG-0080-1)
①	Cable	Nou1 7/0.128S*4C+AL+832/0.1(Tinned Copper-Clad Steel) Black PVC OD:3.5mm	1 PCS		S-AC028P-4-401-3

**SRCO** 东莞市盛瑞科技有限公司  
Dongguan Shengrui Technology Co., Ltd.

修正: Revisions  
Tony 2022/09/30

Rev. A1 新建料号

Unless otherwise specified  
公差  
公差  
公差  
公差

TEL: 86-769-8216714/87988775 MAIL: srco@dsrco.com

机型 Model  
客规 Customer P/N  
盛瑞料号 Part No.  
Environmental standard  
RoHS

核准 Approved: 12/11/23  
审核 Checked: 郑昊 12/11/23  
安规 Safety  
製圖 Drawn: Tong 12/11/23  
頁碼 Page: 1/1

圖名 Description: USB A/M to PH-4pin L=0.5M  
Cable

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.