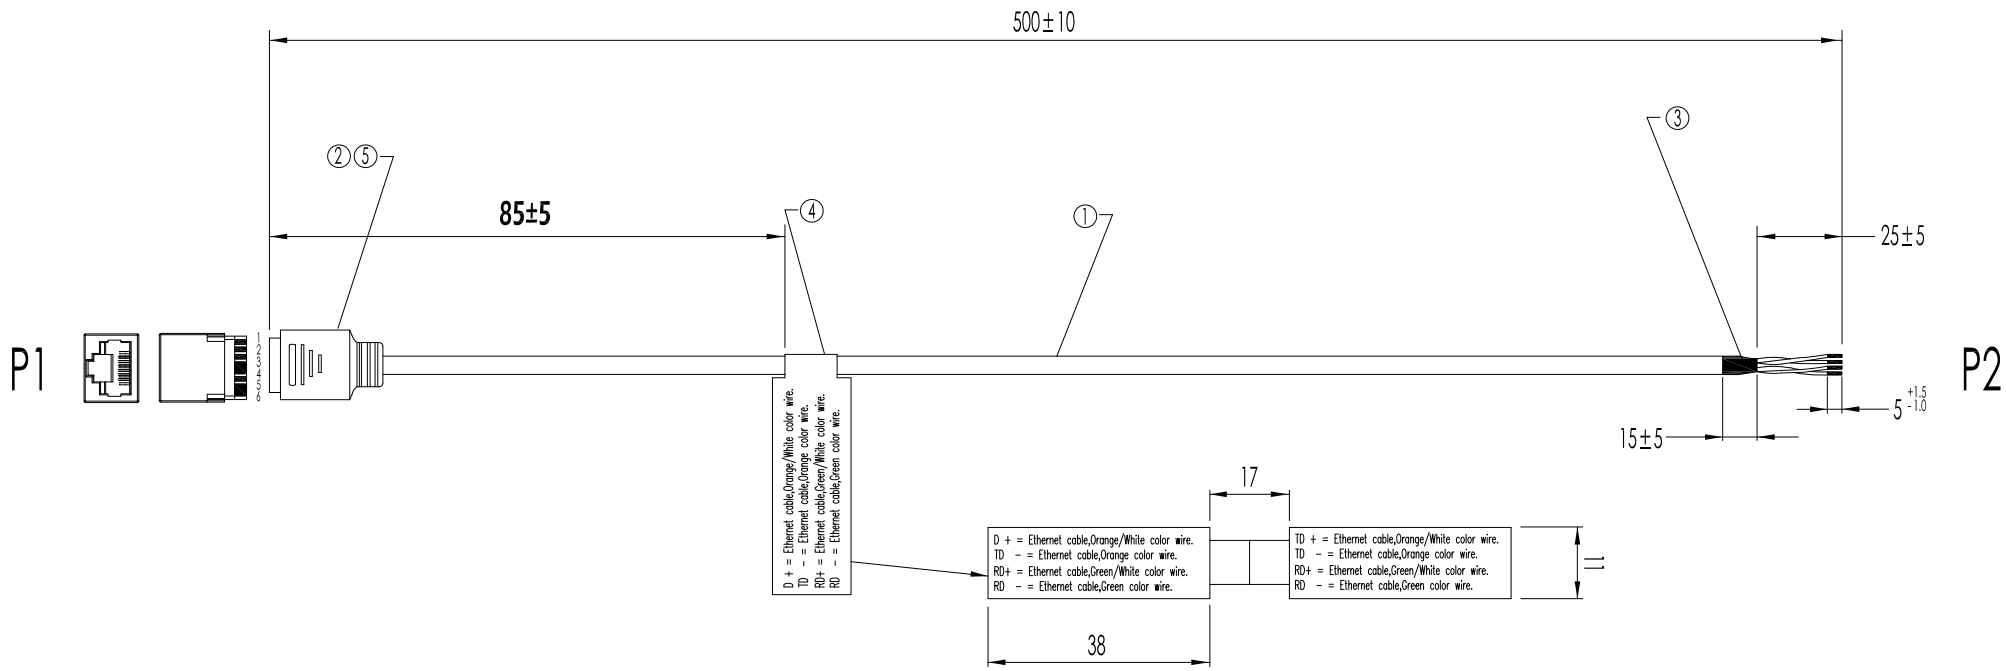

接线图 (Wiring Diagram)

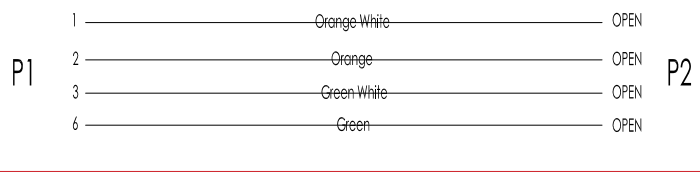

Item	Parts Material	Specification	Q'ty	Note	P/N
⑤	Label	Silver Label	1 PCS		
④	Inside mold	LD-PE TS001	20g		
③	Outside mold	Black PVC -45P	35g		
②	Connector	RJ45 8P8C Female-type 20.3x15.8x12.6mm Black	1 PCS		
①	Cable	(7/0.15BC,ID:0.95mm,Green white twisted-pair,HDOrange/Orange White twisted-pair, PE)x2P+AL OD4.0MM PVC Black	510 mm		

Test Conditions:
1.100% open,short,miss wire&intermittent test.
2. Conductor resistance: 5Ω Max.
3. Insulation resistance: 10MΩm Min.
4. Insulation resistance: 300V DC/10ms.

Rev.	修正 Revisions

-Tolerances-
Unless otherwise specified
公差

连接器公差	线材公差
X.X : ±0.35	0-200 : ±5
X.XX : ±0.30	200-800 : ±10
X.XXX: ±0.20	800-1490 : ±20
頁碼 Page: 1/1	L >1490 : ±30

SRCO®
东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.
TEL:86-769-82167146/87988175 MAIL:srco@gdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

機型 Model	-	核准 Approved	Tian	12/29/'22	圖名 Description:
客號 Customer P/N	-	審核 Checked			RJ45 Femal-type 4Pin to Open Cable L=0.5M
盛瑞料號 Part No.	Y-112-B0-10049-1	安規 Safety			
Environmental standard	RoHS	製圖 Drawn	郑岚	12/29/'22	
單位 Unit:MM 比例 Scale	Third angle projection	設計 Design	Tong	12/29/'22	