


PIN ASSIGNMENT 接线图

P1	颜色	P2
1	黑	1
2	棕	2
3	红	3
4	橙	4
5	黄	5
6	绿	6
7	蓝	7
8	白	8

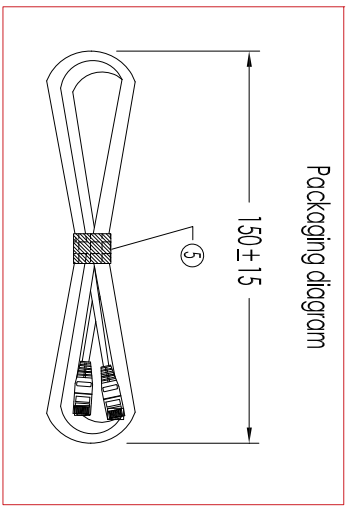

Item	Parts Material	Specification	Qty	Note	P/N
⑤	Velcro	Velcro block	1 PCS		
④	Outside mold	Block PVC-4SP	30g		
③	Sheath	Cat6 Cat6 Ethernet Network Plug RJ45 Crystal Head sheath black	2PCS		
②	Connector	Cat6 Ethernet Network Plug RJ45 with shielding shell	2PCS		
①	Cable	OD:4.9MM 8C(9/0.1)58C(1D:0.9MM)HDPE Red/black/blue/yellow/orange/brown OD4.0 MM Soft PVC Jacket Block	3.01 M		

Test Conditions:
 1. 100% open short miss with intermittent test;
 2. Conductor resistance: 5Ω Max;
 3. Insulation resistance: 10MΩm Min;
 4. Insulation resistance: 300V DC/10ms.

Rev.	修正 Revisions

- Tolerances - Unless otherwise specified	
公差	公差
XX.X : ±0.5	0.200 : ±0.5
XXX.X : ±0.30	0.200 - 800 : ±0.5
XXXX.X : ±0.20	800 - 490 : ±0.20
X° : ±2°	L : ±0.10

<p>SRCO 东莞市盛瑞科技有限公司 Dongguan Shengrui Technology Co., Ltd. TEL: 86-769-8216714/87988775 MAIL: srco@dsrco.com</p>		<p>机型 Model 客號 Customer P/N 盛瑞料號 Part No. Environmental standard RoHS Third angle projection</p>		<p>核准 Approved 審核 Checked 安規 Safety 製圖 Draw 頁碼 Page</p>		<p>圖名 Description Cat6 Ethernet Network cable 8P8C L=3M</p>	