

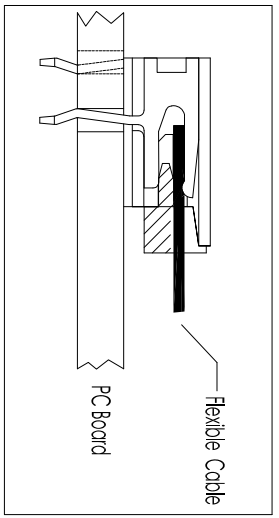

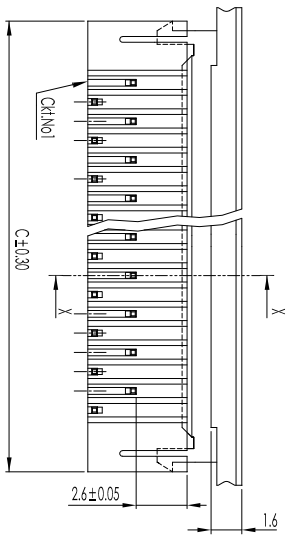
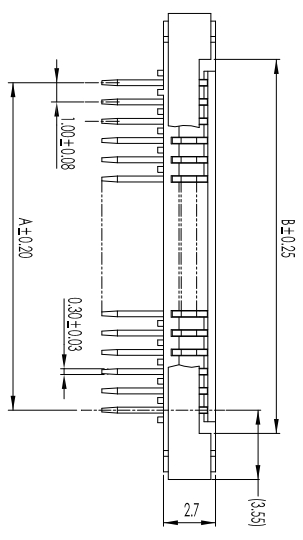



CKTS	DM/A	DM/B	DM/C
03	2.00	4.20	8.40
04	3.00	5.20	9.40
05	4.00	6.20	10.40
06	5.00	7.20	11.40
07	6.00	8.20	12.40
08	7.00	9.20	13.40
09	8.00	10.20	14.40
10	9.00	11.20	15.40
11	10.00	12.20	16.40
12	11.00	13.20	17.40
13	12.00	14.20	18.40
14	13.00	15.20	19.40
15	14.00	16.20	20.40
16	15.00	17.20	21.40
17	16.00	18.20	22.40
18	17.00	19.20	23.40
19	18.00	20.20	24.40
20	19.00	21.20	25.40
21	20.00	22.20	26.40
22	21.00	23.20	27.40
23	22.00	24.20	28.40
24	23.00	25.20	29.40
25	24.00	26.20	30.40
26	25.00	27.20	31.40
27	26.00	28.20	32.40
28	27.00	29.20	33.40
29	28.00	30.20	34.40
30	29.00	31.20	35.40

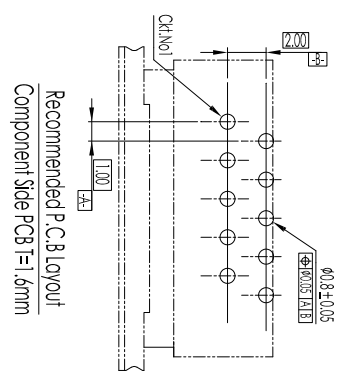

Item	Parts Material	Specification	Qty	Note
③	Terminal	Phosphor Bronze CS191/ Tin over nickel	CKTS PCS	A100AZ-TTEG-201
②	Cover	LCPJU94-V0/Color: Nature	1PCS	A100AZ-CLAT-102
①	Housing	LCPJU94-V0/Color: Nature	1PCS	A100AZ-CHSG-101

- NOTES:
- Current Rating: 0.5A AC/DC
 - Voltage Rating: 50V AC/DC
 - Temperature Range: -30°C to 85°C
 - Contact Resistance: 20mΩ Max.
 - After Environmental Testing: 20mΩ Max.
 - Insulation Resistance: 500MΩ min.
 - Clamping Force: 0.05Kg/Pin/Min.
- F - 100 G xx V - LP P T - R 6 Z - X
- ① F=FFC/FPC Connector
 - ② 100=Pitch 1.00mm
 - ③ G=G-Type Series
 - ④ XX= No of Contacts
 - ⑤ B=Bottom Contact Type/I=Top Contact Type/R=Vertical Right Contact Type/V=Vertical Left Contact Type/S=Single Contact Type/D=Dual Contact/N=Indiscriminate
 - ⑥ PT=PT/66= NYLON 66/46= NYLON 46/6T= NYLON 6T/9T= NYLON 9T/1P=LCP/PP=PPS
 - ⑦ B=Brass/P=Phosphor Bronze/H=High conductivity copper/R=Red copper/C=Copper Alloy
 - ⑧ Surface Processing:0=None/I=In Bright/G=Gold Flash Plating/N=Nickel Plating/=In Matte/2=3u" Gold/3=5u" Gold/4=6u" Gold/5=10u" Gold/6=15u" Gold/7=20u" Gold/8=30u" Gold/9=Silver Plating/H=Half of Gold Tin
 - ⑨ V=Vertical Dip type/R=Right Angle Dip type/L=Vertical SMT type/W=Right Angle SMT Type/S=Special P.C.B Model
 - ⑩ Insulator Height:1=0.90mm/2=1.00mm/3=1.20mm/4=1.50mm/5=2.00mm/6=2.70mm/7=3.00mm/8=5.00mm/N=Indiscriminate
 - ⑪ N=Non-ZIF Type/Z=ZIF Type
 - ⑫ Packaging: 1=PE bag/2=tube/3=Reel/4=Hot Tape&Reel/5=Reel+CAP/6=Reel+MW/7=PC Tray/8=tube+CAP/9=tube+MW/or

Rev.	修正 Revisions
A.01	SR-010-XX01A3 Tony 2019/05/16
A.02	变更料号 Tony 2020/07/21

TEL: 86-769-8216714/87988875 MAIL: srco@qdsrco.com

各款 Customer P/N	盛瑞科技 Part No.
-	F-100GAW-LPPT-R6Z-X

核准 Approved	Tian 07/21/20
審核 Checked	郑斌 07/21/20
安規 Safety	Tong 07/21/20
製圖 Drawn	Tong 07/21/20
頁碼 Page	1/1

Rev.	修正 Revisions
A.01	SR-010-XX01A3 Tony 2019/05/16
A.02	变更料号 Tony 2020/07/21

TEL: 86-769-8216714/87988875 MAIL: srco@qdsrco.com

各款 Customer P/N	盛瑞科技 Part No.
-	F-100GAW-LPPT-R6Z-X

核准 Approved	Tian 07/21/20
審核 Checked	郑斌 07/21/20
安規 Safety	Tong 07/21/20
製圖 Drawn	Tong 07/21/20
頁碼 Page	1/1

ZIF FOR FFC/FPC PH 1.00mm ASSY