

NOTES:

1. Current Rating: 3.0A AC/DC
2. Withstand Voltage: 250V AC/minute
3. Working Temperature: -40° C to 105° C
4. Insulation Resistance: 500MΩ Min.
5. Contact Resistance: 20mΩ Max.

P - 254 3 S 02 6 1 - PT B G - 0 201 B - 1

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

① P=PIN/Female Header series

② 2.54=Pitch 2.54mm

③ 1=Pin header/2=Female header/ 3=Mini Jumper/ 4=Machined Pin header/ 5=Machined Female Header/M=I Type

④ S=Single Row/D= Double Row/I=Three Row/F=Four Row

⑤ XX=No. of Contacts

⑥ Insulator Height: A=1.0mm/β=1.35mm/C=1.5mm/D=1.70mm/E=1.95mm/
F=2.0mm/G=2.5mm/H=3.0mm/I=3.2mm/J=3.4mm/K=3.5mm/L=4.0mm/M=4.3mm/
N=4.6mm/O=5.0mm/P=5.7mm/Q=6.0mm/R=6.35mm/S=7.0mm/T=7.1mm/
U=7.2mm/V=8.1mm/W=8.5mm/X=8.9mm/Y=9.4mm/Z=10mm/θ=Indiscriminate/V=2.54mm
/I=7.40mm/2=3.10mm/4=4.50mm/5=2.10mm/6=6.50mm

⑦ Insulator Quantity: 1=1 Insulator/ 2=2 Insulator/ 3=3 Insulator

⑧ PBT/66= Nylon 66/46= Nylon 46/6T= Nylon 6T/9T= Nylon 9T/I.P.= LCP/PS= PS

⑨ C=Copper Alloy/β=Brass/P=Phosphor Bronze/H=High conductivity
copper/R=Red Copper


⑩ Plating=0=None/I=Tin Bright/N=Nickel Plating/G=Gold Flash Plating/I=Tin
Mother/2=3U" Gold/3=5U" Gold/4=10U" Gold/5=15U" Gold/6=20U"
Gold/7=15U" Gold/8=30U" Gold/9=Silver Plating/H=Half of Gold Tin

⑪ V=Vertical Dip Type/R= Right Angle Dip Type/L=Vertical SMT Type/W=Right Angle
SMT Type/S=Special P.C.B Model/O=Without

⑫ 201=Product Identification Code

⑬ Color: B=Black/W=White/R=Red/U=Blue/G=Green/E=Gray

⑭ Packaging: 1=PE bag/2=Tube/3=Reel/4=Hot Tape Reel/5=Tape&Reel/CAP/
6=Tape&Reel+PEI/7=PVC Tray/8=Tube+CAP/9=Tube+PEI

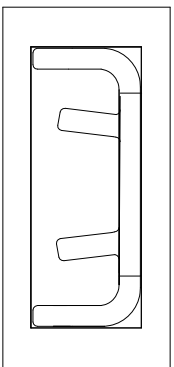

Item	Parts Material	Specification	Qty	Note
②	Contact	Brass/Plating: Au over Ni	×	P254T-001-10GF
①	Insulator	PBT+30%GF UL 94V-0	×	P2543-650-PT01

SRCO 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

TEL: 86-769-8216714/87988775 MAIL: srco@qdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

修正 Revisions

Rev.	新增规格	变更料号
A.01	Tony 2013/07/15	
B.01	Tony 2020/12/09	

Unless otherwise specified

公差	公差
XX : ±0.35	连续公差
XXX : ±0.20	段状公差
XXXX : +0.20/0.00 -0.90 : +0.20	
页面 Page: 1/1	L : +0.90 : +3.0

機型 Model

客議 Customer P/N

盛瑞料號 Part No.

Environmental standard

單位 Unit/mm 比例 Scale

核准 Approved

審核 Checked

安規 Safety

製圖 Draw

設計 Design

12/09/20

12/09/20

12/09/20

12/09/20

12/09/20

圖名 Description:

2.54mm MINI Jumper H=6.50

mm Close Type Connector

P/N