




Dual Number

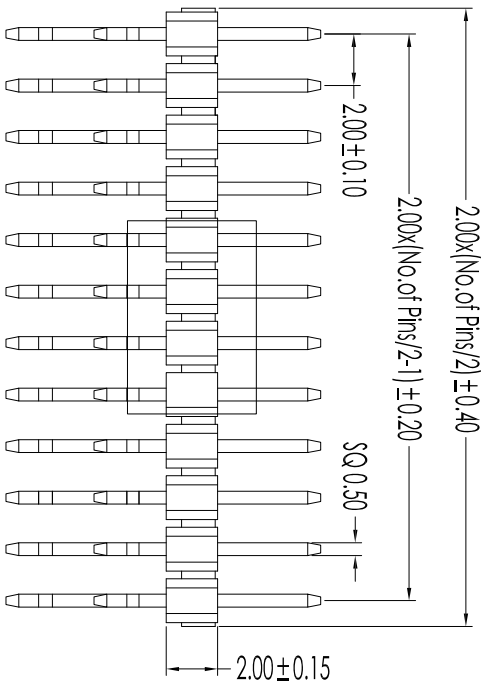


Odd Number

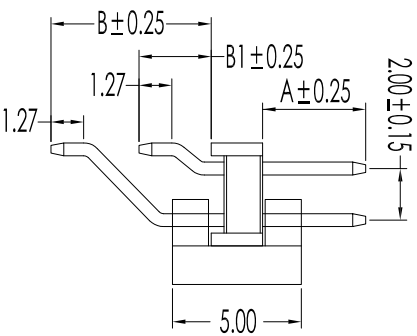

NOTES:

- Current Rating: 2A AC,DC
 - Withstand Voltage: 500V AC/minute
 - Working Temperature: -40° C to 105° C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 20mΩ Max.
- P - 200 1 D xx F 1 - xx B G - W 1Dx B - 1
- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭
- P=PIN/Female Header series
 - 200=Pitch 2.00mm
 - 1=Pin header/2=Female header/3=Mini Jumper/4=Machined Pin header/5=Machined Female Header/M=M Type
 - S=Single Row/D= Double Row/T=Three Row/F=Four Row
 - XX=No. of Contacts
 - Insulator Height: A=1.0mm/B=1.35mm/C=1.5mm/D=1.70mm/E=1.95mm/F=2.0mm/G=2.5mm/H=3.0mm/I=3.2mm/L=3.4mm/K=3.5mm/L=4.0mm/M=4.3mm/N=4.6mm/O=5.0mm/P=5.7mm/Q=6.0mm/R=6.35mm/S=7.0mm/T=7.1mm/U=7.2mm/V=8.1mm/W=8.5mm/X=8.9mm/Y=9.4mm/Z=4.50mm/0=Indiscriminate/Y=2.54mm
 - Insulator Quantity: 1=1 Insulator/2=2 Insulator/3=3 Insulator
 - PBT/66= Nylon 66/46= Nylon 46/6T= Nylon 6T/9T= Nylon 9T /LP: LCP/PS= PPS
 - C=Copper Alloy/B=Brass/P=Phosphor Bronze/H=High conductivity copper/R=Red Copper
 - Plating: 0=None/1=In Bright/N=Nickel Plating/G=Gold Flash Plating/I=Tin Matte/2=30" Gold/3=50" Gold/4=10" Gold/5=150" Gold/6=200" Gold/7=150" Gold/8=300" Gold/9=Silver Plating/H=Half of Gold Tin
 - Package: 1=PE bag/2=tube/3=Reel/4=lot Tape Reel/5=tape&Reel/CAP/6=tape&Reel/HFI/7=PVC Tray/8=tube+CAP/9=tube+PEI
 - X=V= Vertical Dip Type/R= Right Angle Dip Type/L=Vertical SWT Type/W=Right Angle SWT Type/S=Special P.C.B Model
 - 110=Product Identification Code
 - Color: B=Black/W=White/R=Red/U=Blue/G=Green/E=Grey

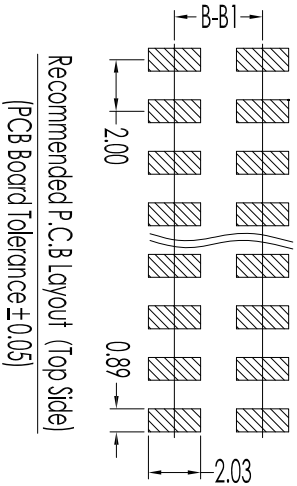

Recommended P.C.B Layout (Top Side)
[PCB Board Tolerance ±0.05]

Item	Product Identification Code	Pin Length	A	B1	B
ID0		6.90	1.90	2.80	6.22
ID1		8.00	3.00	2.80	6.22
ID2		9.00	4.00	2.80	6.22

Item	Parts Material	Specification	Qty	Note	P/N
①	Insulator	PA6T +30%GF & PA9T +30%GF, IUL 94V-0	×		P2004-020-6T01
②	Contact	Brass/Gold flash all over nickel	×		P200T-050-10GF

SRCO 东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

Rev. 修正 Revisions
A.01 新增规格 Tony 2021/12/09

TEL: 86-769-8216714/87988775 MAIL: srco@dsrco.com

Rev.	修正 Revisions	核准 Approved	日期 Date	圖名 Description
A.01	新增规格 Tony 2021/12/09	審核 Checked	12/09/21	PH2.00mm 2xpin Right Angle SWT Type Pin Header
		安規 Safety	12/09/21	
		製圖 Drawn	12/09/21	
		設計 Design	12/09/21	

各號 Customer P/N
盛瑞科技 Part No.
Environmental standard
RoHS
Third angle projection

單位 Unit: mm 比例 Scale: 1:1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI TECHNOLOGY CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.