


- Technical requirements:**
1. The copper buckle spring should not have any detachment, and the screws should be loosened in place.
 2. The screw head cannot be scratched, and the screw teeth function normally. The stripped cannot oxidize or deform.
 3. The printing and color on the surface of the plastic should be correct, and there should be no defects such as shrinkage, water marks, fusion marks, or burrs.

- Quality control project:**
1. Size control: Refer to the "□" mark.
 2. Functional testing.

Performance Parameters

Torque	0.5N.m(4.93lb.in) (5.10kgf.cm)	0.5N.m(4.93lb.in) (5.10kgf.cm)
Operating temperature	-30°C - 120°C	-30°C - 120°C
Wire Stripping length	4.5 - 5mm	4.5 - 5mm
Applicable Wires	22 - 14AWG	2.5mm ²
Withstanding Voltage	AC2000V/1Min	AC2000V/1Min
Insulation Resistance	DC500V 500MΩ	DC500V 500MΩ
Technical Data	AC300V 12A	AC250V 24A
ITEM	UL	IEC

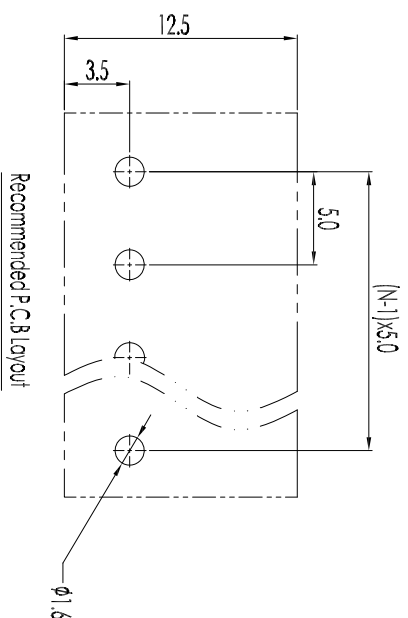

Item	Parts Material	Specification	Qty	Note	P/N
④	Pin header	Copper alloy/Imp-plateing	N Pcs	T-55006-11-501-CS	
③	Reed	Copper alloy/Nickel-plating or stainless steel	N Pcs	T-55006-11-500-SB	
②	Screw	M3.0 steel,Zinc plated, "slot" type	2 Pcs	T-55006-11-500-SW	
①	Insulator	Nylon 66 JU94V-0	1 Pcs	T-55006-11-500-HS	

Rev.	修正 Revisions	修正 Revisions	公差 Tolerances- Unless otherwise specified	公差 Tolerances- Unless otherwise specified	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGUO INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	機型 Model	客號 Customer P/N	客戶料號 Part No.	環境標準 Environmental standard	RoHS	核准 Approved/ian	審核 Checked	安規 Safety	製圖 Drawn	頁碼 Page	圖名 Description:
A.01	300R-5.00-CA350-02-SRF-NP	Tony 2016/07/15	XX : ±0.25	XX : ±0.25	TEL: 86-769-8216714/87988875	-	-	T-5300E-R1-500-XP-X	Standard	Third angle projection	07/21/20	葉俊	鄭昊	Tong	1/1	Pitch 5.00mm Female Style P.C.B Connector
B.01	变更料号	Tony 2020/07/21	XXX : ±0.15	XXX : ±0.15	MAL: sro@qdsro.com	东莞市盛瑞科技有限公司 Dongguan Shengrui Technology Co., Ltd.			RoHS							



东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

TEL: 86-769-8216714/87988875

MAL: sro@qdsro.com

公差 Tolerances-
Unless otherwise specified

XX : ±0.25

XXX : ±0.15

XXX : ±0.15

X : ±2°

INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

机型 Model

客号 Customer P/N

客户料号 Part No.

环境标准 Environmental standard

RoHS

核准 Approved/ian

审核 Checked

安规 Safety

制图 Drawn

页码 Page

图名 Description: