


200±10

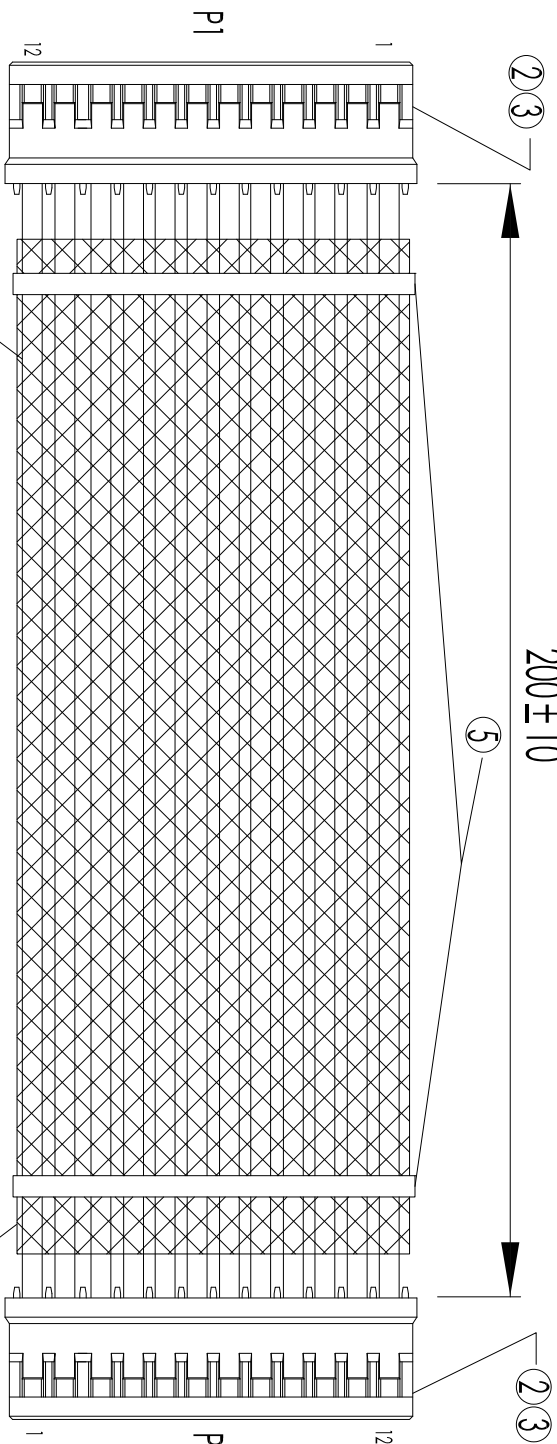

P1	P2
1 Red(红)	12
2 Black(黑)	11
3 Red(红)	10
4 Black(黑)	9
5 Red(红)	8
6 Black(黑)	7
7 Red(红)	6
8 Black(黑)	5
9 Orange(橙)	4
10 Orange(橙)	3
11 Orange(橙)	2
12 Orange(橙)	1

PIN ASSIGNMENT

Item	Parts Material	Specification	Qty	Note	P/N
①	Electronic wire UL1061#28AWG		2PCS		S-10611X28-00-1-3
②	HGS.		2PCS		A-15002H12S-66-0-1
③	Terminal		24PCS		A-15002T0-PT-3
④	Tube		1 PCS		G-NA00-450-31-1
⑤	Tie		2PCS		G-T100-000-MV-1

Wire Model	AWG	Color	Quantity	Cutting Length	P1 Peeling length	P2 Peeling length
UL1061	28	Refer to wiring diagram	10	128±3	3.5±1	3.5±1

Crimp Parameters						
Terminal/Local	AWG	Conductor/Comp. Height/Comp. Insulation	Insulator/Comp. Height/Comp. Insulation	Terminal/Local	Terminal/Local	Terminal/Local
MX1-50-1	28	0.55±0.03	1.02±0.03	1.28±0.03	1.18±0.03	1.5 Kgf

- Electrical Performance**
- Open Short/Interference: 100% Test.
 - Conductor Resistance: 5Ω Max.
 - Insulation Resistance: DC 200V 20MΩ Min.

- 注意事项:**
- Means important control dimensions.
 - Twisted pair direction is unified in a clockwise direction.

Rev.	修正: Revisions	- (Differences- Unless otherwise specified)
A.01	Newly established part number	Tony 2023/07/22

公差	公差	公差
XX.X : +0.30 0~200 : ±0.5	公差	公差
XXX.X : +0.20 200~800 : ±1.0	公差	公差
X.XX : +0.10 800~490 : ±2.0	公差	公差
X.X : ±2° L > 490 : ±3.0	公差	公差

东莞市盛瑞科技有限公司
Dongguan Shengrui Technology Co., Ltd.

TEL: 86-769-8216714/87988775 MAIL: src@dsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI TECHNOLOGY CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

机型 Model	-	核准 Approved	Tan	日期 Date	10/31/73
客资 Customer P/N	-	审核 Checked	郑昊	日期 Date	10/31/73
盛瑞料號 Part No.	W-1061X28-A8-D1025-1	安规 Safety	Tony	日期 Date	10/31/73
Environmental standard	RoHS	製圖 Drawn	1/1	頁碼 Page	1/1
單位 Unit:mm	比例 Scale	Third angle projection			

Wire Harness