
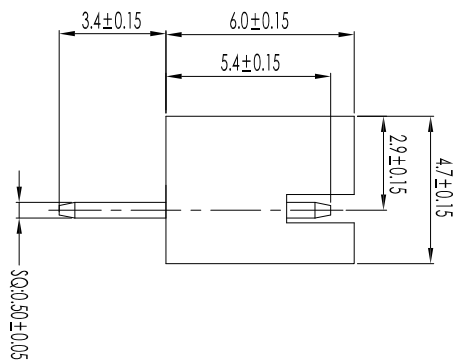
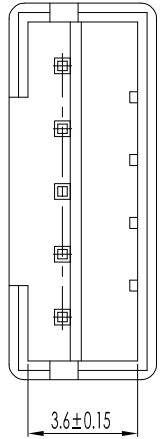


CCT5	DMA	DMB
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00
17	32.00	36.00
18	34.00	38.00
19	36.00	40.00
20	38.00	42.00

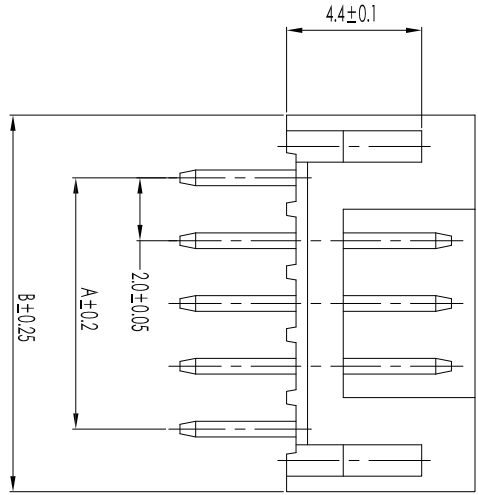

- NOTES:
1. Current Rating: 20A AC/DC
  2. Voltage Rating: 250V AC/DC
  3. Temperature Range: -25° C to 85° C
  4. Contact Resistance: 20mΩ Max.
  5. Insulation Resistance: 800MΩ min.
  6. Withstanding Voltage: 800V AC/minute

- A - 200 01 C xx S - 66 B T - V C - X
- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫
- ① A=Board to Wire Connector
  - ② 200=Pitch 2.00mm
  - ③ 01=PH2.0 Style Series
  - ④ C=Connector/H=Housing/T=Terminal
  - ⑤ XX=No.of Contacts
  - ⑥ S=Single Row/D=Dual Row/A=Assembly
  - ⑦ PT=PPBT/66= Nylon 66/46= Nylon 46/  
6T= Nylon 6T/9T= Nylon 9T/LP=LCP/PS=PPS
  - ⑧ C=Copper Alloy/B=Brass/P=Phosphor Bronze/H=High conductivity copper
  - ⑨ Plating:0=None/T=In Bright/G=Gold Flash Plating/I=In Matte  
I/2=3u" Gold/S=5u" Gold/L=10" Gold/S=15u" Gold/S=20u" Gold/  
7=30u" Gold/8=Nickel Plating/S=Silver Plating/H=Half of Gold Tin
  - ⑩ V=Vertical Dip Type/R=Right Angle Dip Type/L=Vertical SMT  
Type/W=Right Angle SMT Type/S=Special P.C.B Module
  - ⑪ 0=Standard/1=1 Type/2=2 Type/3=3 Type/C=C Type
  - ⑫ Packaging: 1=PE bag/2=tube/3=tape Reel/7=PPVC Tray/  
8=tube+CAP

Item	Parts Material	Specification	Qty	Note	P/N
②	PIN Material	Brass(H62)/Tin-Plating	×		A20001-TPIN-302
①	Insulator	PA66/ Color: Natural/Beige	×		A20001-CHSG-301

Rev.	修正 Revisions	
A.01	A2001-NA-ST	Tony 2009/07/15
B.01	变更料号	Tony 2020/07/21

- Tolerances - Unless otherwise specified	
XX	: ±0.25
XXX	: ±0.15
XXXX	: ±0.05
X.°	: ±2°

**SRCO** 东莞市盛瑞科技有限公司  
Dongguan Shengrui Technology Co., Ltd.  
TEL: 86-769-8216714/87988875 MAIL: srco@qdsrco.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SHENGRUI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

機型 Model	-
客號 Customer P/N	-
盛瑞料號 Part No.	A-20001 CxS-66BT-V-C-X
Environmental standard	RoHS
單位 Unit:mm	比例 Scale: 1/1
Third angle projection	☉

核准 Approved	Tian 07/21/20	圖名 Description:	Pitch 2.00mm(PH2.0) Cimp Style Connector
審核 Checked	郑昊 07/21/20		
安規 Safety			
製圖 Drawn	Tong 07/21/20		
頁碼 Page	1/1		